


**Note**

Carefully lift vehicle to avoid accidents and damage to vehicle. Prior to lifting vehicle with a vehicle jack, be sure to protect vehicle by means of chocks (part No. 110 583 01 75) or the like against moving off.

For safety reasons (risk of tilting) T-sedans model 123 and special vehicles (special body) models 114, 115 and 123 should be lifted in empty condition only.

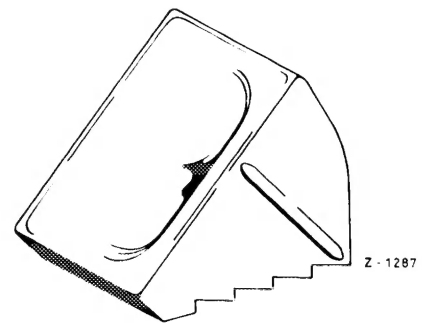

On level ground, protect one wheel of opposite vehicle end against moving off.

On a gradient, protect both wheels of opposite vehicle end against moving off.

On vehicles with manual transmission, engage first gear step. On vehicles with automatic transmission, place selector lever into position "P".

Step down energetically on parking brake pedal.

Push mounting pin of vehicle jack completely into respective plug-in tube (3) in outer longitudinal member of frame.

Position vehicle jack vertically — also on a gradient.

